


| | |
|-------------------------------------|--|
| Nominal Voltage: | 1.4 V |
| Rated Capacity: | 90 mAh at 3000 ohm to 1.1 V at 21°C (70°F) |
| Nominal Internal Impedance: | 16 ohm @ 1kHz |
| Average Weight: | 0.3 gm |
| Volume: | 0.06 cm ³ |
| Terminals: | Flat |
| Operating Temperature Range: | 0°C to 50°C (32°F to 122°F) |
| ANSI: | 7005 ZD |
| IEC: | PR70 |

Typical Discharge Characteristics at 21°C (70°F)

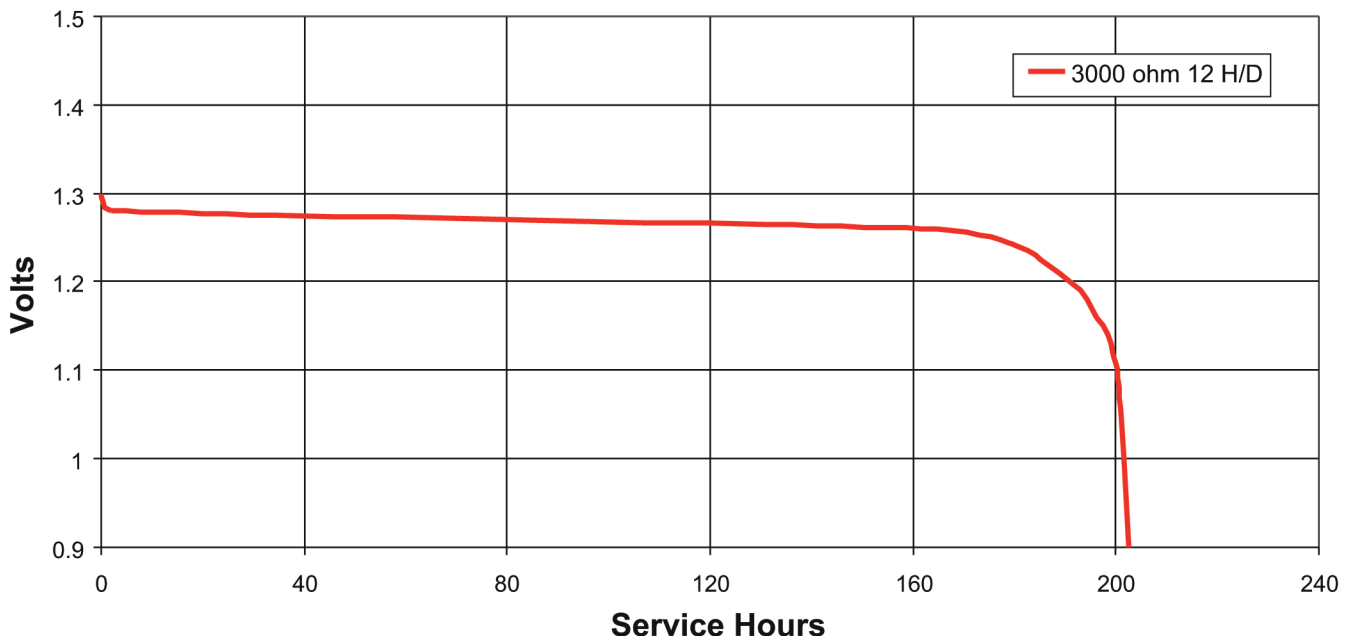

| | | |
|--|--------------------------|--|
| | Berkshire Corporate Park | Internet: www.duracell.com |
| | Bethel, CT 06801 U.S.A. | Telephone: Toll-free 1-800-544-5454 |

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.